

Контроллер SC-WD5 (12/24V, 216/432W)

- Remote Distance: Max 15meters
- On/off and dimmer control
- 5%-100% brightness control, 32 levels (successional)
- Learn-in function, one receptor can be controlled by two sender, one sender can controlled no limited receptor.
- RF 433mHZ; Battery: C2032 five kind of receptors, constant voltage and constant current. 0-10V signal receptor.
- AC On/off switch

SENDER SIZE:
diameter 45mm
H:18mm



How to Learn

- press the receptor button.(LED on)
- press the sender button.press receptor button again.

How to use

- Short press is ON/OFF. both LED ON (see picture:3)
- Long press is dimmer, Red is up and blue is down (see picture:1 & 2)



picture:1



picture:2




picture:3

General Instruction:



how to install

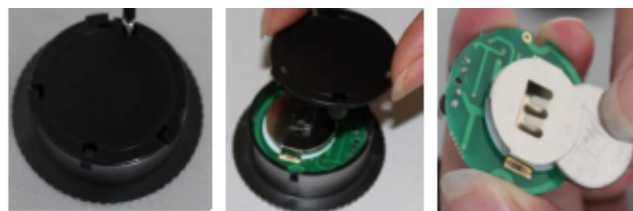

How to replace the battery

KC-10-SMART

- Input Voltage: DC 12
- Output Voltage : 0-10V* 3

KC-700-SMART

- Input Voltage: DC 12-36V
- Output: current 700mA/CH
- MAX: 25W/CH

KC-300-SMART

- Input Voltage: 220-256V
- Only on/off Max 300W

KC-700-SMART

- Input Voltage: DC 12-36V
- Output: current 350mA/CH
- MAX: 12.5W/CH

KC-32-SMART

- Input Voltage: DC 12-32V
- Output: 5A/per channel