

## Диммер SMART-RECEPTOR

### Пульт управления SMART-DIM

#### Product Speciality

1. 0-100% brightness control, 32 levels;
2. 1 On/off function;
3. Can control max 5 different channels;
4. Each channel can have no-limited receptor;
5. Remote control RF;
6. Learn-in function, one receptor only can be controlled by one sender, one sender can controlled no limited receptor;
7. Two kinds receptors, constant current and constant current.



Пульт управления SMART-DIM



Держатель



Диммер SMART-RECEPTOR

#### Application Sites

- Building Decoration: Business spaces, airports, subway;
- Indoor Decoration; Lighting and back lighting for hospital, hotel, marketplace, square, dining-room, pub and etc;
- AD solid Word, sign and mark, signboard and billboard;
- Be used as big area back lighting source.

#### Product Attributes

##### Sender

- Radio frequency 433 MHZ
- Size 135 (L)X41(W)X19(H) mm
- Weighty 60g


##### Receptor (CONSTANT VOLTAGE)

- DC V\_in 12/32V
- V\_out 5A(Max) per channel, 12V (120W); 24V (240W)
- Size 178 (L)X45(W)X20(H) mm
- Weighty 100g

## Receptor (CONSTANT CURRENT)

- DC V\_in 12/36V
- V\_out Max voltage=input voltage, current 700Ma/channel, MAX: 25W/CH
- Size 178 (L)X45(W)X20(H) mm
- Weighty 100g


## Dimension:

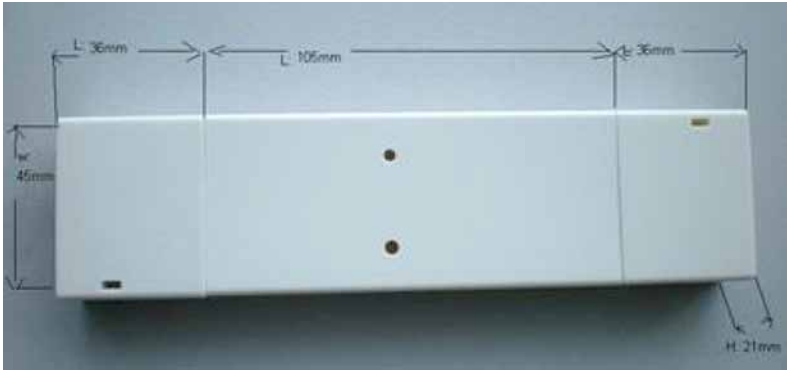

## Operation Instruction:

1. CH: press to select the channel
2. ON/OFF: press to ON or OFF one channel
3. + : Brightness plus
4. - : Brightness Minus

## Application diagram

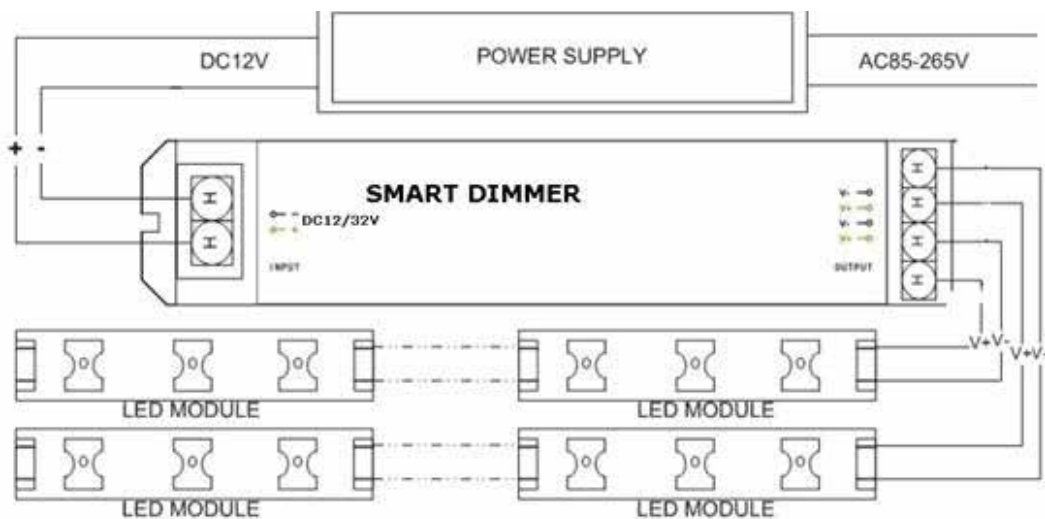

Remark: Constant current is coming...↵